

GB40 12V **1000A** | **6.0L** **3.0L**
Lithium | Gas Diesel

Lead Acid
Wet Gel MF EFB AGM
Auto | Marine | RV | Powersport | Lawn & Garden

NOCO BOOST[®] PLUS[™] JUMP STARTER



START DEAD BATTERIES.[™]

Cars, Boat, Motorcycles, ATVs, Trucks & More.

UltraSafe, ultra-compact, rugged, and portable lithium-ion jump starter. Features spark-proof technology and reverse polarity protection. Instantly jump starts most single-battery applications, up to 20 times on a single charge. Ideal for a wide range of vehicles including trucks and engines up to 6.0L Gas and 3.0L Diesel.



SPARK PROOF.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

JUMP START. 20X

Full power to jump start a vehicle up to 20 times in one charge. Compatible with engines up to 6.0L gas and 3.0L diesel.

USB CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

100 LUMENS. 2X LED

The GB40 portable car battery jump starter integrates with a high-output 100 lumen LED flashlight with 7 light modes: low, medium, high, flashing, strobe, and emergency SOS.

NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO[®]

MORE POWER.

A Fraction Of The Size.

8X

Lighter & Smaller

Compact, portable, pocket-sized jump starter that fits perfectly in your glove box.

1 Year+

Holds Charge 4x Longer

The GB40 holds the charge four times longer to extend battery power life and eliminate charge time.

Compared to Leading Traditional Lead Acid Jump Starters



Error LED. Illuminates Red if reverse polarity is detected.



Manual Override. Is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.



NOCO Patented Technology
Patented: visit no.co/patents

Recharge Unit from any USB or 12V port.

USB 2.1A
Charge virtually any USB device, including Smartphones and Tablets.

Technical Specifications



Internal Battery:	24 Watt-Hour Lithium Ion	Housing Protection:	IP65 (w/ Ports closed)
Peak Current Rating:	1000A	Cooling:	Natural Convection
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Dimensions (LxWxH):	7.7 x 3.2 x 1.7 in
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Unit Weight:	1.65 lbs
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight w/Clamps & Accessories:	2.4 lbs
Micro USB (Input):	5V, 2.1A	LED Flashlight Brightness:	100 Lumens
USB (Output):	5V, 2.1A		

Recharging a GB40 (for reference, results may vary)

USB Charger Rating	Charging Time
.5A	12hr
1A	6hr
2A	3hr

What's In The Box

- GB40 Lithium Jump Starter
- Heavy-Duty Battery Clamps
- 12V Car Charger
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

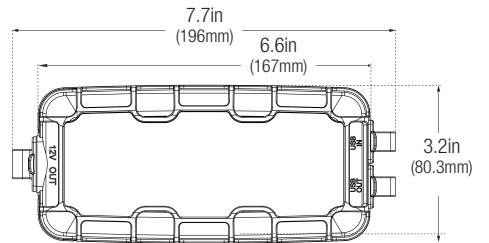

Retail Packaging:

Dimensions: 3.62"x4.57"x8.27"
Weight: 2.75lbs
UPC: 0-46221-15002-5

Inner Carton:


Dimensions: 4.01"x8.78"x5.12"
Weight: 2.89lbs

Master Carton:

Dimensions: 9.25"x12.60"x11.22"
Weight: 18.30lbs
Quantity: 6
UCC: 10046221150022

Units Per Pallet:

NA - 360 Units
EU - 270 Units



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO®